
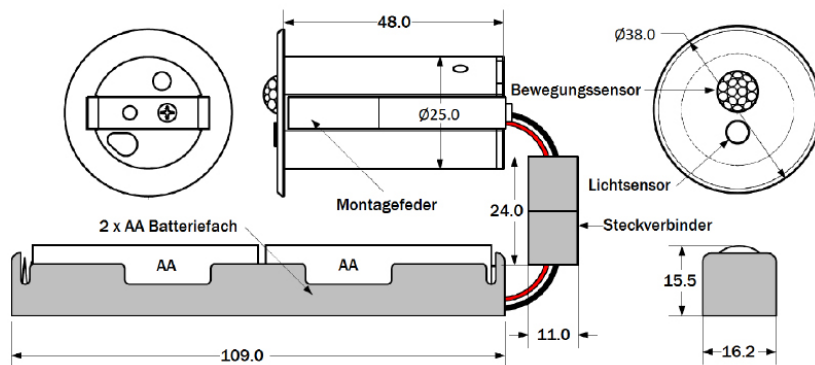


Bewegungs- und Tageslichtsensor mit CASAMBI-Lichtsteuerung

Motion and daylight sensor with CASAMBI lighting control

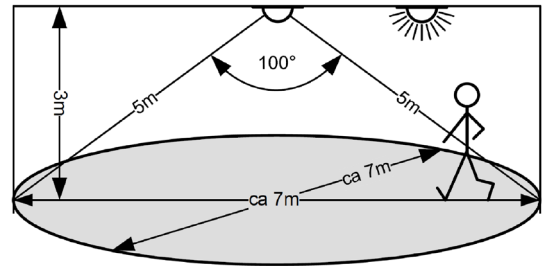

		weiß white	grau grey	schwarz black
Artikelnummer	Part no.	808890	808891	808892
Typ	Type	SEMLBTBAW	SEMLBTBAGR	SEMLBTBAB
Versorgungseingang	Power supply input		3 Vdc (2 x AA)	
Funksignal	Radio signal		2,4..2,483 GHz; 4 dBm	
Umgebungstemperatur (ta)	Ambient temperature (ta)		-20..+50 °C	
Schutzart	Degree of protection		IP44 Front / IP20	
Abmessungen	Dimensions		38/25 x 48 mm	

- Batteriebetriebener Sensor für Bewegung und Tageslicht (PIR) zum komfortablen Bedienen mit Smart-Geräten und Steuerung von Geräten in CASAMBI-Netzwerken
- Mit der CASAMBI-App konfigurierbar und vielseitig nutzbar
- Reichweite max. 5 m, 100° horizontal, 64 Zonen
- Einbaugerät, zur Montage in Dose oder Hohldecke, Bohrung 25..27 mm
- Sensor wird mit Batteriefach und 2 x AA-Batterie geliefert
- Zum Entkoppeln des Sensors wird der mitgelieferte Magnet benötigt
- Nur für „Evolution“-Netzwerke geeignet!

- Battery-powered motion and daylight sensor (PIR) for convenient operation with smart devices and control of devices in CASAMBI networks
- Configurable with the CASAMBI app and usable in many ways
- Range max. 5 m, 100 ° horizontal, 64 zones
- Built-in device, to be mounted in flush mounted box or false ceiling, drill-hole 25..27 mm
- Sensor is supplied with a battery compartment and 2 x AA batteries
- The supplied magnet is required for unpairing the device
- Only suitable for “Evolution” networks!